



www.agcam.com

AgCam Kit

PN: 6M, 7M, 9M-C1(2)

The DM AgCam is built Ag-tough. It can handle anything life on a farm or ranch can throw at it.



Incredibly easy to install, there are no complicated installation instructions. A single power input adaptor powers the entire system. Mount your cameras and monitor, hook up your cables and power up. THAT'S IT! No permanent installation is required, so moving the system takes no more than 5 minutes in most applications.

FEATURES:

Camera:


- ◆ Built-in, high quality 1/3" CCD Camera
- ◆ Standard lens features 92 deg. field of view. Optional lenses: 2.8mm, 6mm, 12mm & 16mm
- ◆ Built-in CDS light-source sensor can automatically turn on/off built in IR by detecting the light source of environment
- ◆ Waterproof, Shockproof. Suitable for nearly any use
- ◆ Our exclusive Photochromic camera body lens darkens in bright conditions and becomes completely transparent under low light

TFT LCD Monitor:

- ◆ Choice of 6", 7" or 9" Monitor
- ◆ Remote control
- ◆ 7" and 9" monitors complete with built in TV tuner (7" available w/o tuner)
- ◆ Functions include adjustable color, brightness, volume and contrast
- ◆ Selectable Audio Video inputs. (All monitors equipped with two (2) A/V inputs)
- ◆ Features TFT LCD technology; allowing for a larger degree of view from a greater angle

Cables:

- ◆ Our durable extension cables come in 20' and 60' standard lengths and feature sturdy, watertight connectors
- ◆ Custom cables of 10', 40' and 50', as well as a 60' audio enabled cable are available.
- ◆ Silicone jacket enables high flexibility in all temperatures

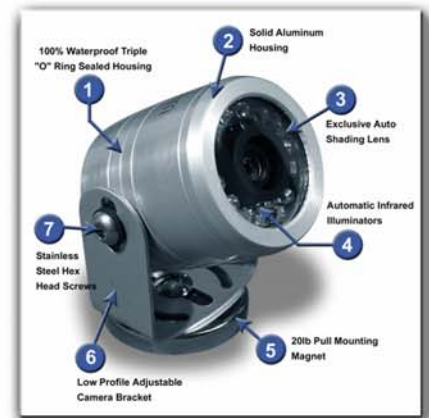

EMERGENCY

AGRICULTURE

BUSSES

INDUSTRIAL





SPECIFICATIONS:

Camera

Image Pick-Up Device	Sony 1/3" Super HAD CCD
Horizontal Resolution	540 TV Lines
Minimum Illumination	0 LUX @ F2.0
Scanning System	Interlaced 2:1
Lenses Furnished	Board Lens 3.6mm/F2.0 Photochromic Body Lens
Video Output	1 Vp-p/75 Ohms
Operating Temp.	-45°F~150°F (-42°C~66°C)
Construction	Powder Coated Aluminum
Waterproofing	IP 68/69
Dimensions	2"(h)x2.25"(L)
Weight	13.2oz (374g)
Warranty	3 years

6" Monitor 4.5 high
7" Monitor 4.75" high
9" Monitor 5.75 high

6" Monitor 6.5" wide
7" Monitor 7.75" wide
9" Monitor 9.25" wide



6" Monitor 1.25" deep
7" Monitor 1.5" deep
9" Monitor 1.5" deep

Monitors

Screen Size	6", 7" & 9"
Power Input	DC, 12v+/-10%, <1500mA
Operating Temp	23°F to 140°F
Storage Temp.	-4°F to 170°F
Display Method	TFT Active Matrix
Resolution (HxV)	960(H)x234(V)=224x640 dots
Backlight	Cold Cathode Filament
Viewing Angle	L/R: 80 Top: 30 Down: 10
Weight	1lb 10oz (737g) average
Warranty	2 Years



KIT INCLUDES:

- Monitor (6", 7" or 9")
- Monitor Remote
- A/V Adaptor
- Camera(s)
- A/C Power Adapt
- 12v/Hardwire Power Adapt
- 60' Cable
- 20' Cable
- Cable Clips

Power accessories not shown